BRYTON PARK®

Assembly Instructions

Poly Swingbed






Thank you for choosing BRYTON PARK®

We hope that this piece brings you many years of enjoyment!

View this product online at Premium Poly Patios

PARTS (included)

Ⓐ Seat (1)



Ⓑ Backrest (1)



Ⓒ Left Arm (1)



Ⓓ Right Arm (1)



HARDWARE (included)



ⓐ ¼" x 4" Bolts (2)

ⓑ ¼" x 3" Bolts (6)

ⓒ $^{5}/_{16}$" Flange Nuts (4)

ⓓ ¼" Flange Nuts (8)

ⓔ 1½" Screws (15)

ⓕ $^{5}/_{16}$" Eyebolts (4)

ⓖ Square Drive Bit (1)

ⓗ Allen Wrench (1)

TOOLS NEEDED

$^{7}/_{16}$" & ½" Wrench or Socket

Screwgun

PREMIUM POLY PATIOS

STEP 1

Bolt the seat and back together with the 4" bolts. Put a ¼" flange nut on the bolt. Semi-tighten only with the $^{7}/_{16}$" socket. Note: Do not fully tighten the nuts until all bolts are put in the arms in step 2. This allows the back to be adjusted. (See photos 1, 2 & 3.)



photo 1

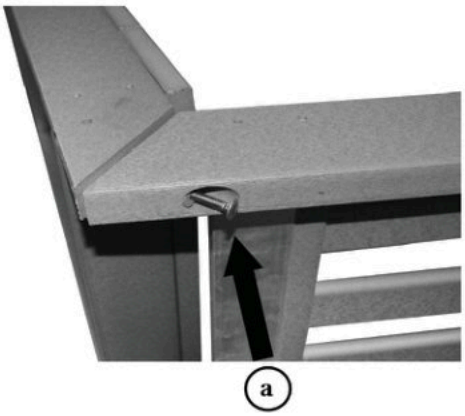


photo 2

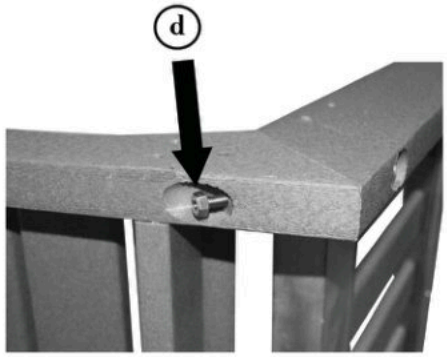


photo 3

View this product online at Premium Poly Patios

STEP 2

Fasten the arms to the seat and back. Line up the holes on the 2x4's on the bottom of the arm with two of the holes on the side of the bed. (The first hole in the front is used to attach the eyebolt.) Put a 3" bolt through the holes in the 2x4's and attach to bed by putting on ¼" flange nut. Put another 3" bolt through the hole on the back of the armrest. Line up with the bottom hole on the back and put on ¼" flange nut and tighten. (Note: If the holes do not line up properly, loosen the nuts on the bottom of the seat then the back can be adjusted.) Take the 1½" screws and insert in the predrilled holes in the slats on the arm and fasten to the side of the swingbed. (Extra screws are provided.) See photos 4 & 5.

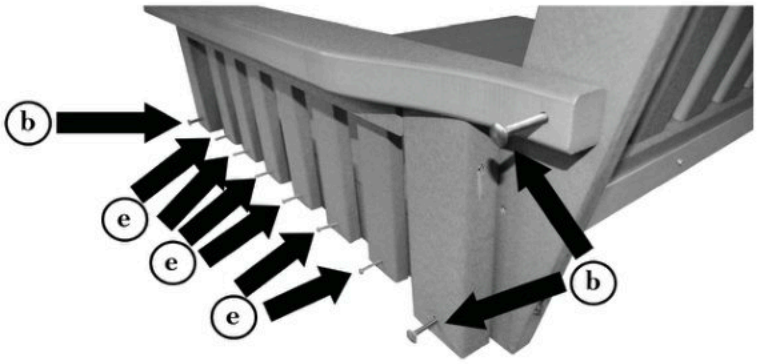


photo 4

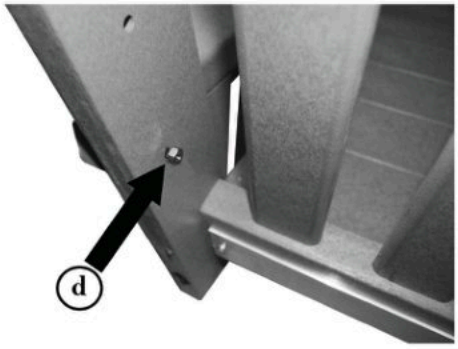


photo 5

STEP 3

Take an eyebolt & put through the hole above the arm on the back. (The eye of the bolt belongs on the outside.) Put a $^{5}/_{16}$" flange nut on the end and tighten with the ½" wrench. Repeat on the other side. Find the predrilled holes in the side of the seat in front of the arm braces. Repeat above steps & put eyebolts in both holes. (See photos 6 & 7.)

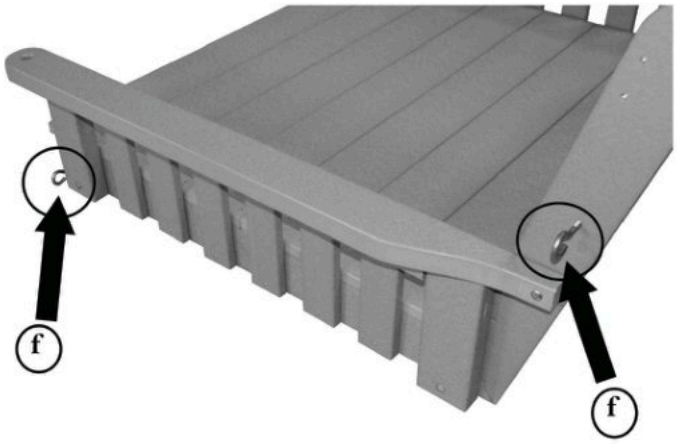


photo 6

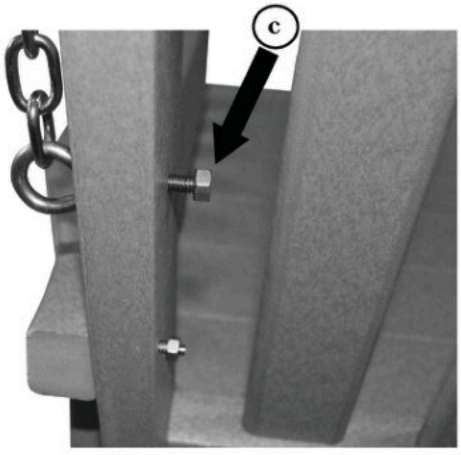


photo 7

View this product online at Premium Poly Patios

If your swingbed has chains, go to step 4. If it has ropes, skip step 4 & go to steps 5 & 6.

STEP 4

Attach the chains to the swingbed. The chains in the front go through the hole in the armrest & attach to the eyebolts below the arms. Note: If you cannot hook the chain onto the eyebolts, loosen the nuts on the end of the eyebolts. Turn the eyebolts so the opening is turned down. Now fully tighten the hex nuts with the ½" wrench while holding the head of the eyebolt. Attach the chain to the hooks at the ceiling. The swingbed can be hung from two or four points at the ceiling.

STEP 5

Attach the rope to the swingbed. Take a rope, put the end through the hole in the armrest, & through the eyebolt below the arm. Pull on through the eyebolt & make a knot in the end of the rope. (See photos below.) Attach another rope to the eyebolt in the back assembly the same way then repeat on other side. The swingbed is now ready to hang. Hook the rings on hooks at the ceiling or if you purchased comfort springs hook the rings on one end of the springs and hook the other end of the springs to the ceiling. The swingbed can be hung from two points or four points at the ceiling.

STEP 6

You will now need to adjust the ropes until the swingbed is at the desired height. The ropes are all fully adjustable. To lower the swingbed push the bottom loops on the end of the rope further up the rope then hold the top loops with one hand & pull the end of the rope up through the loops. To raise the swingbed pull the rope through the loops in the opposite direction. The ropes attached to the front of the swingbed will need to be adjusted to a different length than the ropes attached to the back. If the swingbed hangs crooked adjust the ropes accordingly until it hangs properly.

How to make a knot:



