



Feel the Difference®


Assembly Instructions

Garden Bench (GA-Be-28, 42, 54, 60)

Tools Needed: Hammer, $\frac{7}{16}$ " wrench, #2 square bit screw driver or power driver, punch.
No drilling is required. All the necessary holes are predrilled. Bolts fit snugly in the holes.
You may need to use a hammer to drive the bolts through the holes.




Parts

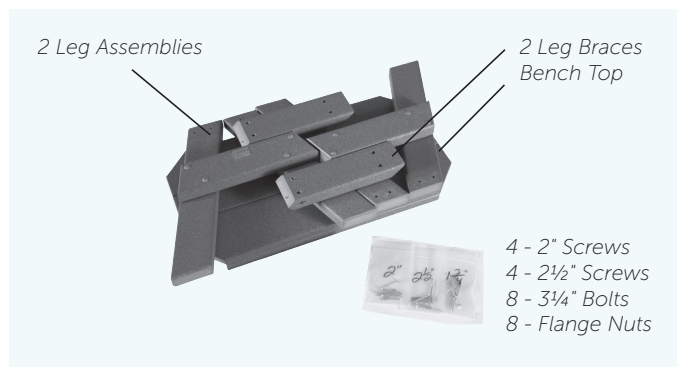

Step 3 — Install Braces


2½" Screws, 2" Screws, Leg Braces

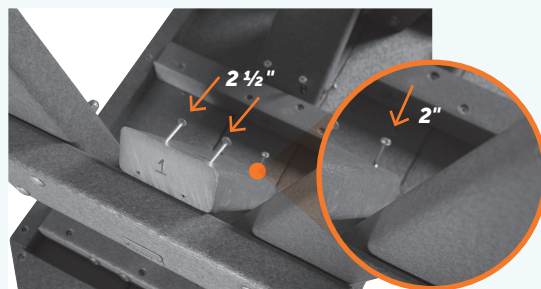

Place the leg braces so that the pilot holes of the leg braces align with those of the legs and bench top. Using 2" screws fasten each leg brace to the bench seat. Then, using the 2½" screws, fasten each leg brace to the legs.

Step 1 — Install Legs

Flange Nuts, Leg Assemblies

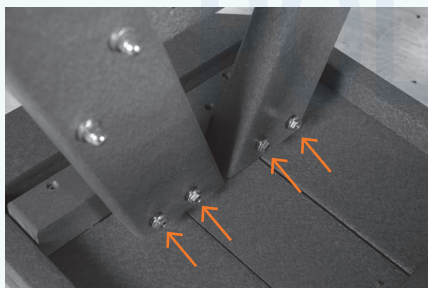

Lay the parts on a protective surface such as cardboard or a blanket to begin. Set the bench top on the ground so that it's under side is facing up. Place the legs on the bench top underside, aligning the pilot holes on the underside of the bench top.

Insert the bolts through the pilot holes, tapping the bolt heads with a hammer to set the bolt head firmly against the leg assembly.

Add nuts on the bolts and tighten securely.

Congratulations!
Your **Garden Bench**
is ready to enjoy!



[View this product online at Premium Poly Patios](#)