





Assembly Instructions

SKU#: LH-100

- (1) Seat/back legs
- (1) Back
- (2) Front legs
- (2) Arms
- (1) Hardware pack

TOOLS NEEDED

Square head bit (Included)
1/2" wrench or socket set

Qty.	Description
2	3/4" bolt
4	2 3/4" bolt
6	3 1/2" bolt
4	1 1/2" screw
10	 nuts
10	 washers

Step 1

Attach front legs to seat using
(6) 3 1/4" chair bolts, (6) Washers & Nuts



Gently tap the head of the carriage bolt so that the square part of the bolt goes into the material or tighten the nut until it pulls in the carriage bolt so that the head of the bolt is flush with the material.

Step 2

Attach back to legs using (4) 1 1/2" screw



Make sure to have the bottom of the back push up against the back of the seat. Screw directly into the material on the top of the leg.

Step 3


Secure both arms to back using
(2) 2 3/4" bolts, (2) nuts (2) washers



Rest the front part of the arm on the front leg while connecting the back of the arm to the back.

Step 4

Attach front arm to leg using (1) 2-1/4" bolt and (1) nut & washer.

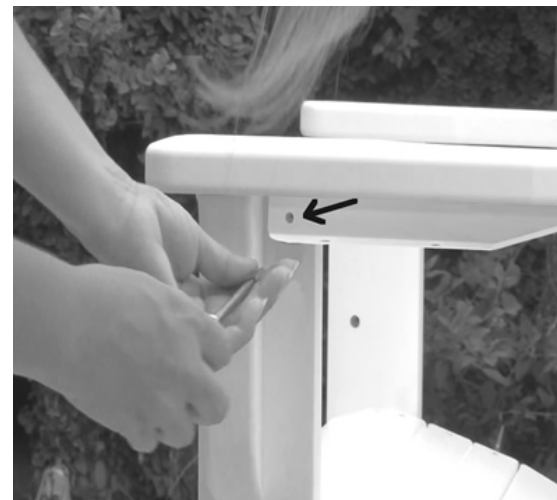

Put the head of the bolt on the inside so that the threads of the bolt are on the outer side of the leg.